

Project Name:	
Catalog #:	
Fixture Type:	
Notes:	

MOUNTING

- Standard versatile mounting arm accommodates multiple drilling patterns as well as square and round poles
- Wall Mount available for direct wall mounting and J-box mounting
- Optional for die-cast aluminum slipfitter mounting adapter

Mounting Options




Arm Mount (Square or Round poles)
Standard versatile mounting arm is simple to install and can be used with existing poles for retrofit installations.



Slipfitter Mount
An optional cast aluminum mast arm adapter secures fixture head to nominal 2"(2-3/8"O.D. pipe size) horizontal steel tenon arm.



Wall Mount
Wall Mount is easy to install for direct wall mounting with 1/2" conduit wiring or standard J-box mounting

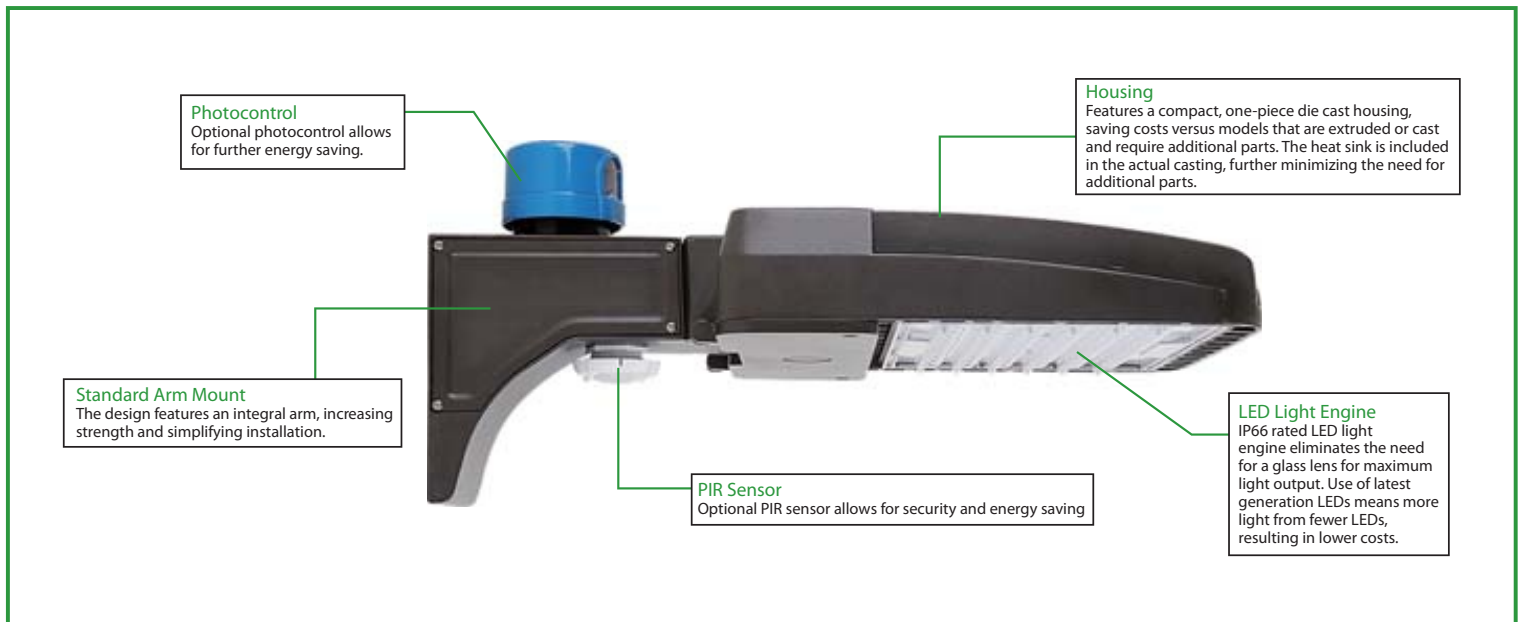

INSTALLATION KIT




Slipfitter Installation kit

NO. SPFD04DA

Finish: Dark Bronze

USE: For pole mounting. Aluminum mast arm adapter secures fixture head to nominal 2"(2-3/8"O.D. pipe size) horizontal steel tenon arm. Furnished with two 1/2" hex head stainless-steel screw.

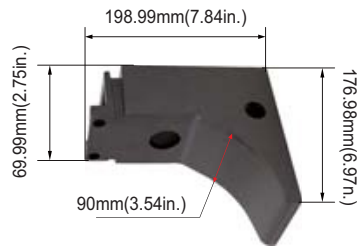


Square Poles Installation kit

NO. SQAL01DA-A

Finish: Dark Bronze

USE: Standard versatile mounting arm for MESTER Area Light application, with K/O to install Photocell or sensor. Furnished with two 5/16" hex head stainless-steel bolts and two 1/2" hex head stainless-steel screw. Suitable for 4" & 5" square pole.




Round Poles Installation kit

NO. SQAL01DA

Finish: Dark Bronze

USE: Standard versatile mounting arm for MESTER Area Light application, with K/O to install Photocell or sensor. Furnished with two 5/16" hex head stainless-steel bolts and two 1/2" hex head stainless-steel screw. Suitable for 4" & 5" round Poles.




Yoke Installation kit

NO. YKFD04DA

Finish: Dark Bronze

USE: The yoke mount attaches an MESTER floodlight(70W/105W/150W/200W) to almost any surface: wall, roof, or wood pole. It can be used with our 2-3 / 8 "O.D. Tenon mounting bracket (SP-TR-D) to install.



250W Trunnion Installation kit

NO. TRFD04DA

Finish: Dark Bronze

USE: The trunnion mount attaches an MESTER floodlight(250W/300W) to almost any surface: wall, roof, or wood pole. It can be used with our 2-3 / 8 "O.D. Tenon mounting bracket (SP-TR-D) to install.



Wall Mount Installation kit

NO. WMAL01DA

Finish: Dark Bronze

USE: Wall Mount is easy to install for direct wall mounting with 1/2" conduit wiring or standard J-box mounting, and with K/O to install Photocell or sensor. Furnished with two 5/16" hex head stainless-steel bolts.

POLE BRACKET · For mounting one fixture on an existing pole




4" Square Pole Mount with 2-3/8" O.D. Tenon

No. 4SQ-SP-D

Finish: Dark Bronze

USE: For use with square, non-tapered steel and aluminum poles. Furnished with four 5/16" hex head stainless-steel bolts. Vertical tenon measures 2-3/8" O.D., and is made of steel tubing. Fixtures mounted to this bracket can be adjusted both vertically and horizontally.



5" Square Pole Mount with 2-3/8" O.D. Tenon

No. 5SQ-SP-D

Finish: Dark Bronze

USE: For use with square, non-tapered steel and aluminum poles. Furnished with four 5/16" hex head stainless-steel bolts. Vertical tenon measures 2-3/8" O.D., and is made of steel tubing. Fixtures mounted to this bracket can be adjusted both vertically and horizontally.



4" Round Pole Mount with 2-3/8" O.D. Tenon

NO. 4SQR-SP-D

Finish: Dark Bronze

USE: For use with Round, non-tapered steel and aluminum poles. Furnished with three 3/8" hex head stainless-steel bolts. Vertical tenon measures 2-3/8" O.D., and is made of steel tubing. Fixtures mounted to this bracket can be adjusted both vertically and horizontally.



5" Round Pole Mount with 2-3/8" O.D. Tenon

NO. 5SQR-SP-D

Finish: Dark Bronze

USE: For use with Round, non-tapered steel and aluminum poles. Furnished with three 3/8" hex head stainless-steel bolts. Vertical tenon measures 2-3/8" O.D., and is made of steel tubing. Fixtures mounted to this bracket can be adjusted both vertically and horizontally.



2-3/8" OD Tenon Mount Adaptor for Yoke Fixtures


NO. SP-TR-D

Finish: Dark Bronze

USE: The 2-3/8" OD Tenon Mount Adaptor for Yoke Fixtures is designed to mount MESTER light fixtures that are equipped with a yoke mount onto a 2-3/8" OD tenon.

WALL BRACKET

- Attaches to any flat surface
- Provides wiring access



90° Wall Mount Bracket with 2-3/8" O.D. Tenon


NO. WM-SP-D

Finish: Dark Bronze

USE: The 90° wall mount bracket with 2-3/8" tenon attaches an MESTER floodlight to almost any surface: wall, roof, or wood pole. Provides wiring access and a built-in 2-3/8" O.D. tenon to mount a fixture with our adjustable slipfitter. Suggested 3/8" diameter bolts for mounting. Mounting holes are spaced 3-1/4" apart.



Mid-Pole tenon Bracket



2-3/8" OD Horizontal Tenon Mid-Pole Bracket

NO. SQ-SP-D

Finish:Dark Bronze

USE:2-3/8" OD Horizontal Tenon Mid-Pole Bracket is designed to mount light fixture that is equipped with a adjustable slipfitter onto a 2-3/8" OD horizontal tenon

Round External Mount Horizontal Tenon · To mount 2/3/4 fixtures on a existing pole



Double 90° Horizontal Tenon Adaptor

NO. R60-SP2-90-D

Finish:Dark Bronze

USE:The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Two fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally



Double 180° Horizontal Tenon Adaptor

NO. R60-SP2-180-D

Finish:Dark Bronze

USE:The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Two fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally



Triple 90° Horizontal Tenon Adaptor

NO. R60-SP3-90-D

Finish:Dark Bronze

USE:The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Three fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally



Triple 120° Horizontal Tenon Adaptor

NO. R60-SP3-120-D

Finish:Dark Bronze

USE:The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Three fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally



Quad 90° Horizontal Tenon Adaptor

NO. R60-SP4-90-D

Finish:Dark Bronze

USE:The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Four fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally

